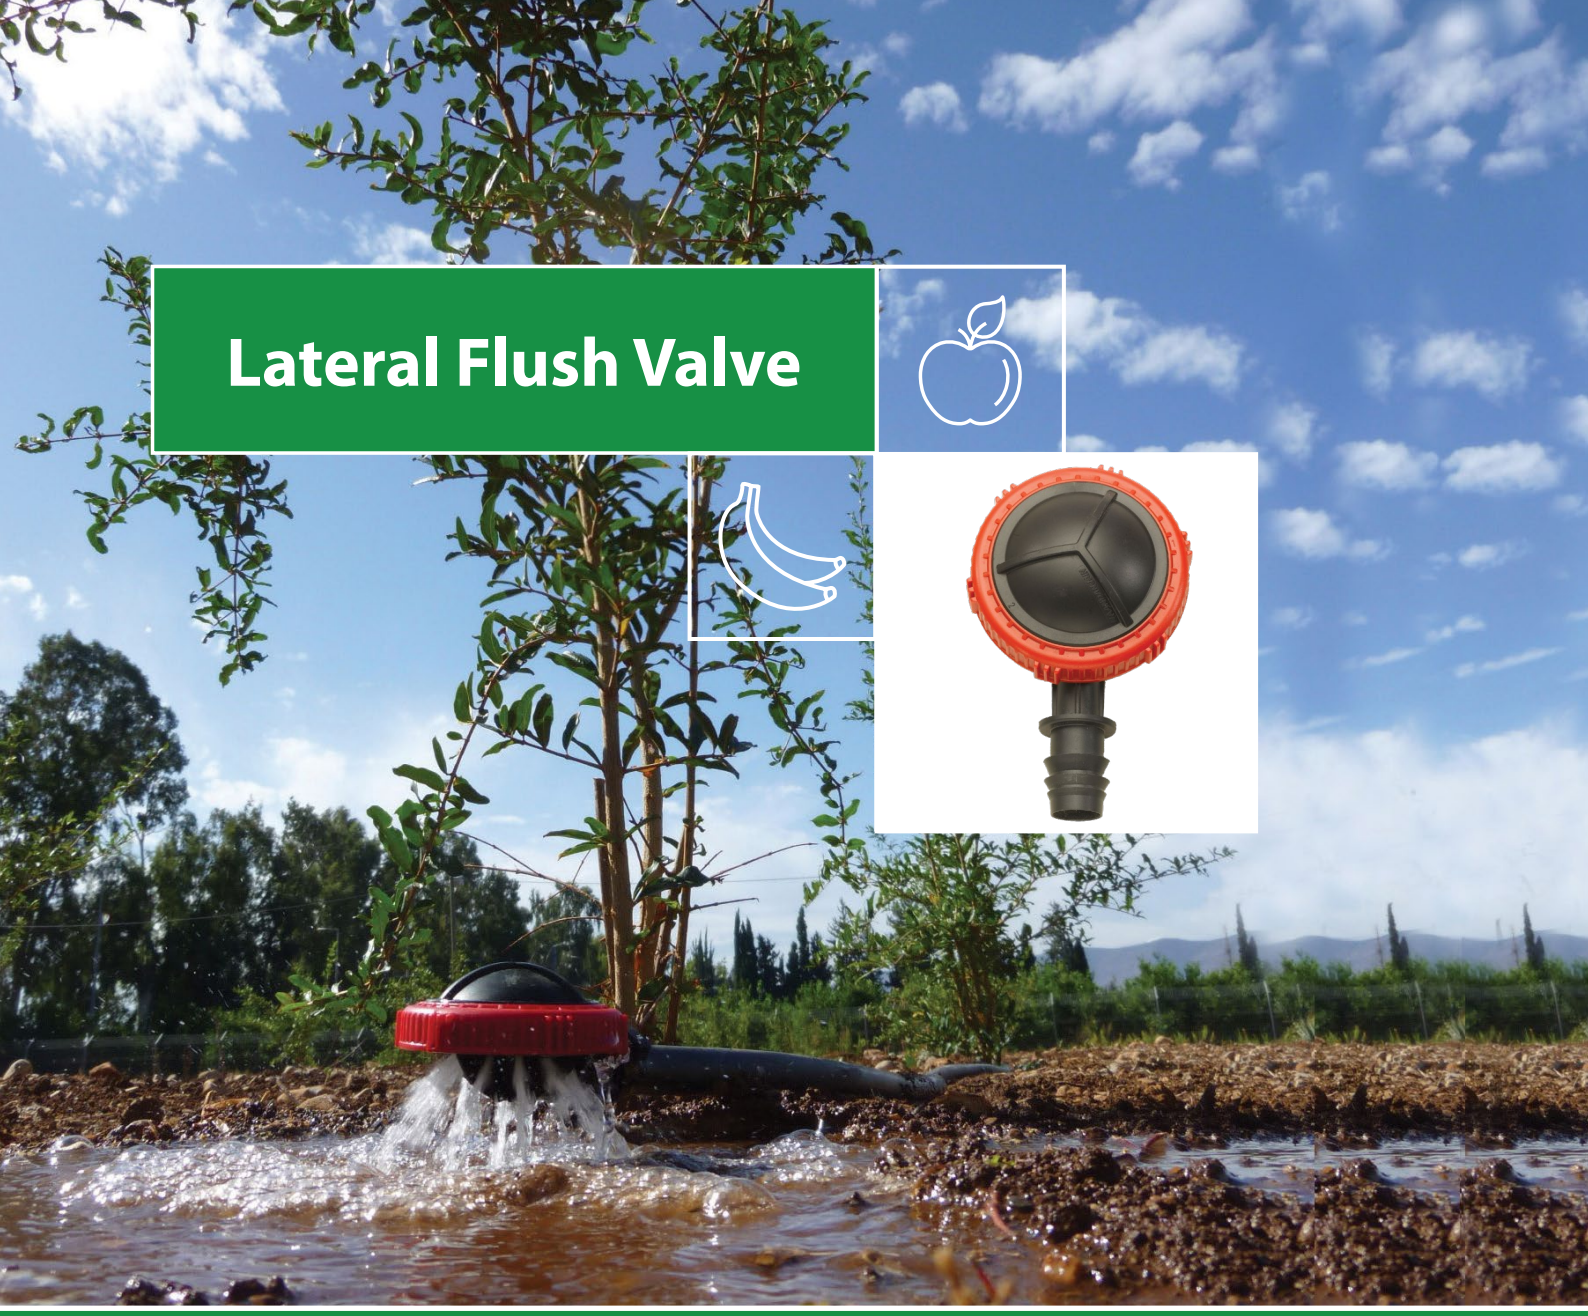

Lateral Flush Valve

Ensure optimal system functionality at all times

Lateral flush Valve

- Suitable for both surface and subsurface drip irrigation
- Robust, simple structure with no metal parts
- Effective in water quality conditions that require frequent flushing

NaanDan by Rivulis

www.rivulis.com

Lateral Flush Valve - Ensure optimal system functionality at all times

The automatic Lateral Flush Valve is meticulously designed to support installations that demand regular flushing, ensuring the continuous peak performance of your drip system in both surface and subsurface applications.

Designed for efficiency and versatility, it offers a simple yet sturdy structure without any metal parts, guaranteeing durability in various water quality conditions that may necessitate frequent flushing. Its high-quality, chemical-resistant materials, coupled with large water passages, contribute to its maximum reliability.

The Lateral Flush Valve's automatic flushing feature, initiated at the beginning of every irrigation cycle, not only streamlines the maintenance process but also ensures optimal system functionality, eliminating the need for manual labor. The valve's red ring allows for easy identification and inspection, while its diverse end connections cater to a variety of dripline types, providing flexibility in system integration.

Technical data

Operating pressure: **0.5-3.0 bar**
Flushing time: **15-25 seconds**
Flush volume: **2-3 liters**

Installation:
Please install flush valve at the same level or above the last dripper, with the red cap facing up.

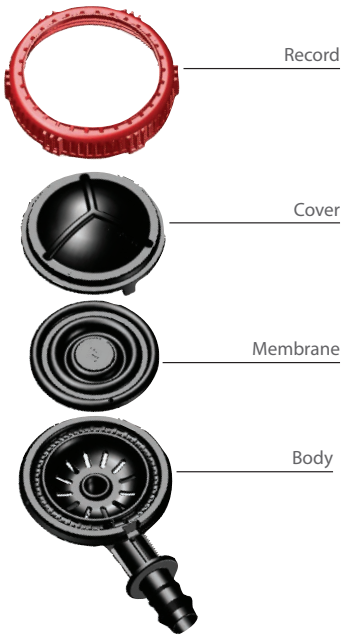

Product Range

	Description	RV Product Number
	Thread 1/2" NPT male	101091911
	Thread 3/4" BSP male	101087329
	Barb 16mm (for w.t 0.9-1.2mm, I.D 13.9)*	101063373
	Barb 16mm (for w.t 0.9-1.2mm, I.D 14.4/14.6)*	101064526
	Barb 20mm (for w.t 0.9-1.2mm, I.D 18.0)*	101064527
	Tape 16mm (5/8") (for w.t 10-18mil I.D 15.4-16mm) black ring	101091912
	Tape 16mm (5/8") (for w.t 25 mil, I.D 15.4-16mm) brown ring	101091913
	Tape 16mm (5/8") (for w.t 35 mil, I.D 15.4-16mm) red ring	101091914
	Snap clip Acetal 16-17mm	101088633
	Snap clip Acetal 20mm	101091915
	Mambrane for Flash Valve	201016379

*All barb connectors come with a free snap clip. It is highly recommended to use it in order to secure the flush valve in place.

Case study outcomes are for information purposes only and actual results may vary. This literature has been compiled for worldwide circulation and the descriptions, photos, and information are for general purpose use only. Please consult with an irrigation specialist and technical specifications for proper use of Rivulis products. Because some products are not available in all regions, please contact your local dealer for details. Rivulis reserves the right to change specifications and the design of all products without notice. Every effort has been used to ensure that product information, including data sheets, schematics, manuals and brochures are correct. However information should be verified before making any decisions based on this information.